


With fixed nozzle



With quick release coupling

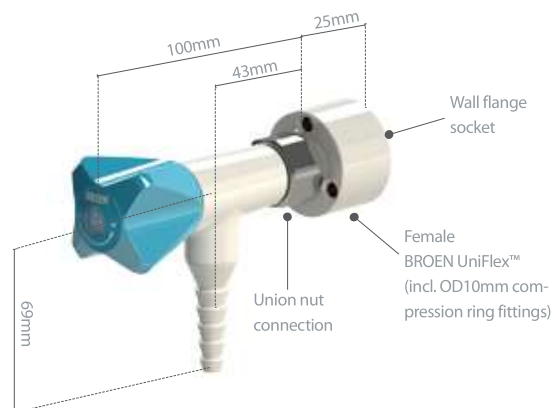

Models

Media	with fixed nozzle	with quick release coupling (hexagon coded)
Compressed air	2530 068 1021-T	2530 166 1021-T
Oxygen	2530 068 1022-T	2530 166 1022-T
Nitrogen	2530 068 1023-T	2530 166 1023-T
Carbon dioxide	2530 068 1024-T	2530 166 1024-T
Argon	2530 068 1025-T	2530 166 1025-T
Helium	2530 068 1026-T	2530 166 1026-T
Dinitrogen monoxide	2530 068 1027-T	2530 166 1027-T

Fittings are delivered with a 700mm PTFE hose with OD10mm inlet connection.

For other options please refer to pages 16 or contact BROEN LAB representative.

SPECIFICATIONS

Handle: Metal, BROEN POLYCOAT powder coated with media indication according to EN13792

Hose nozzle: Metal, fixed (can be unscrewed with Allen key, thread: male G3/8)

Headwork: Needle

Opening/closing function: 3 x 360°

Max. working pressure:

16 bar / 232 psi

Allowable test pressure after installation:

1.5 x max working pressure without function of the valve

MATERIALS WITH MEDIA CONTACT

Materials with media contact are Oxygen approved and ultrasonically cleaned.

Metals: Brass

Plastics: PVDF, PTFE (hose)

Sealing: FKM

Lubricant: Perfluoropolyether based

ORDERING INFORMATION

For standard configuration please refer to the item numbers below.

Other options:

- different media
- removable hose nozzle with union nut
- disability-friendly handle
- micro flow headwork
- alternative hose inlet connection / without a hose
- other inlet options (type, length)
- model with straight valve